

GABIONS

GALFAN (Zn 95Al5) COATED

Gabions are baskets manufactured from double twisted hexagonal woven steel wire mesh type 8x10, made of Galfan (Zn 95Al5 alloy) coated steel wire produced in compliance with EN 10223-3.

The management and production system is certified in compliance with ISO 9001, ISO 14001 (related to the environmental management system) and ISO 18001 (Occupational health and safety).

Gabions are used for the following purposes: retaining structures, river works, erosion control, noise barriers and architectural works.

Gabions are filled with stones at the project site to form flexible, permeable, monolithic structures including retaining walls, channel linings and weirs for erosion control projects.

In order to reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter (Table 3). Dimensions and sizes of Galfan coated gabions are shown in Table 1.

Steel wire mesh

The nominal tensile strength of the wire mesh is as per Table 2. Tests carried out as per EN 10223-3.

Wire

The steel wire used in the manufacture of the unit is galvanized with Galfan, a Zn 95Al5 alloy. The standard specifications of mesh-wire are shown in Tables 2 and 3. All tests on wire must be performed prior to manufacturing the mesh.

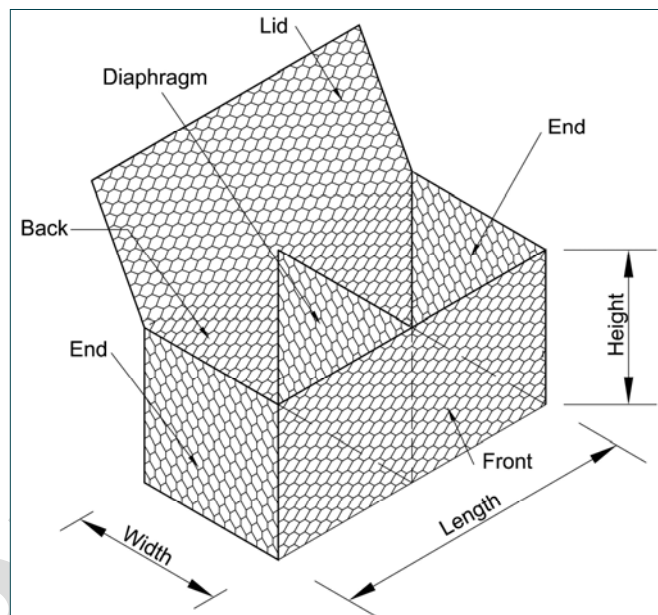


Figure 1

1. **Tensile strength:** the wire used to manufacture gabions has a tensile strength between 350-575 N/mm² in accordance with SANS 675. Wire tolerances are shown in Table 3 as per EN 10218 (Class T1).
2. **Elongation:** Elongation at fracture not less than 8%, as per EN 10223-3.
3. **Galfan (Zn 95Al5) coating:** minimum quantities of Galfan (Zn 95Al5) shown in Table 3 meet the requirements of SANS 10244-2 (Class A).
4. **Adhesion of Galfan (Zn 95Al5):** the adhesion of the Galfan (Zn 95Al5) coating to the wire is in accordance with SANS 10244-2.
5. **Outwearing accelerated aging test** when subjected to test in sulphur dioxide environment (ISO 6988) after 28 cycles of discontinuous test the mesh shall not show more than 5% of DBR (Dark Brown Rust).

The tolerance on the mesh size 'M' being the distance between the axis of two consecutive twists, is according to EN 10223-3




Figure 2



Figure 3: Gabion Galfan (Zn 95Al5)

Table 1: Sizes of Gabions

Length (m)	Width (m)	Height (m)
1.0	1.0	1.0
1.5	1.0	1.0
2.0	1.0	1.0
3.0	1.0	1.0
4.0	1.0	1.0
2.0	0.5	0.5
2.0	1.0	0.5
3.0	1.0	0.5

All sizes and dimensions are nominal. Tolerances of $\pm 5\%$ shall be permitted. Other sizes are available but variation to these standard sizes are only manufactured on request and are uneconomical unless manufactured in large quantities.

Lacing Operations

Lacing operations can be made by using the tools shown in Fig.6. Galfan coated steel rings having the following specification can be used instead of lacing wire (Figs. 4, 5):

- Diameter: 3.00 mm
 - Tensile strength: >1720 MPa
 - Pull-apart strength > 2.0 kN
- Spacing of the rings must not exceed 200 mm (Fig.5)

Quantity Request

When requesting a quotation, please specify:

Item	Description	Unit
	Gabions (Length, Width, Height - Mesh Type 8x10, wire 2.7mm) - Zn 95Al5 coated	Cubic metre (m ³)

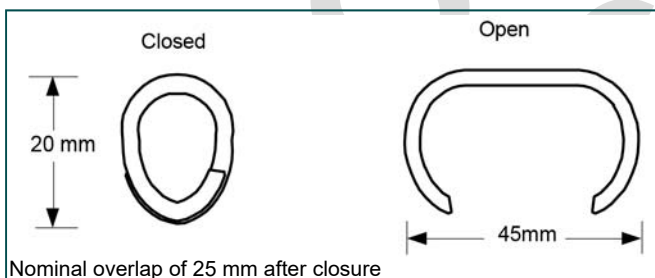


Figure 4

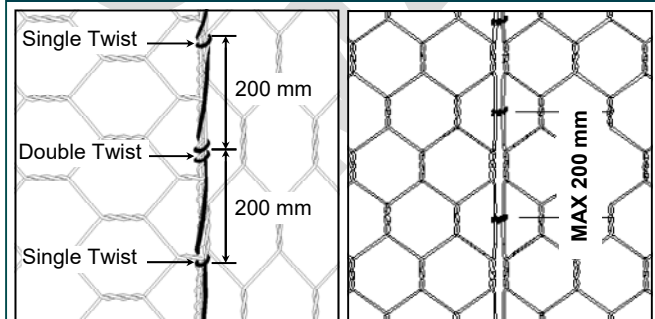


Figure 5: Lacing wire and Rings

Table 2: Standard mesh-wire

Type	M (mm)	Tolerance (mm)	Wire diameter (mm)	Mesh Tensile Strength (KN/m)
8x10	80	-0/+10	2.70	55 $\pm$ 5
			3.0	72 $\pm$ 5

Table 3. Standard wire diameter

		Mesh wire	Selvedge wire	Lacing wire
Internal diameter 8x10	ϕ mm	2.7 3.0	3.4 3.9	2.2 2.5
Wire tolerance	($\pm$) ϕ mm	0.06 (2.7) 0.07 (3.0)	0.07	0.06
Minimum Galfan (Zn 95Al5) quantity	g/m ²	245 (2.7) 255 (3.0)	265 (3.4) 275 (3.9)	230 (2.2) 245 (2.5)

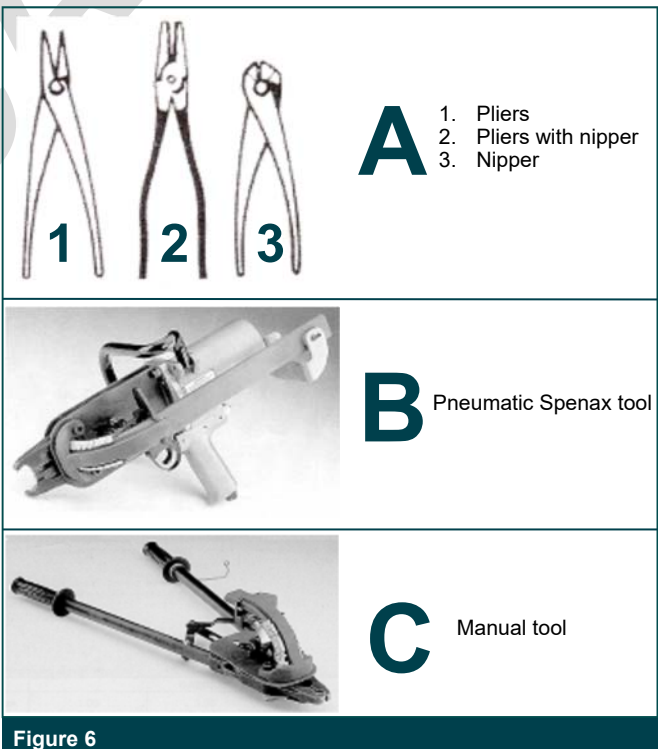


Figure 6

Maccaferri SA (Pty) Ltd t/a
Maccaferri Africa

Head Office: Durban
Branches: Cape Town
East London
Johannesburg
Tongaat (Factory)

P O Box 815
New Germany
3620

National Tel: 087 742 2710
International Tel: + 27 31 705 0500
Fax No: 087 742 2734

www.maccaferri.com/za

Engineering a Better Solution

